

Note on English translation / Hinweise zur englischen Fassung

This is a translation of the technical data sheet valid in Germany.

All stated details and properties are in compliance with the regulations of the German standards and building regulations. They are only applicable for the specified products, system components, application rules, and construction details in connection with the specifications of the respective certificates and approvals.

Knauf Gips KG denies any liability for applications outside of Germany as this requires changes acc. to the respective national standards and building regulations.

KNAUF




Floor Systems

F459.de

Product Data Sheet

2016-05

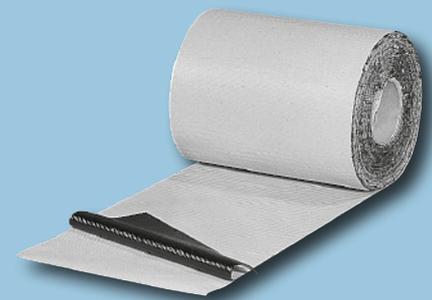

Katja Sprint Anschlussstreifen connector tape

Self-adhesive connector tape for Katja Sprint Abdichtungsbahn sealing membrane

Product description

Katja Sprint Anschlussstreifen connector tape is a full surface self-adhesive bitumen sealing tape with a length of 15 m and a width of 0.20 m. It consists of polymer bitumen.

Storage

Store rolls upright. Protect from direct sunlight and high temperatures. The shelf life is 9 months.

Quality

The product is subject to continuous factory production control.

Field of application

Sealing of the front joints of Katja Sprint Abdichtungsbahn sealing membrane as well as connection of the Katja Sprint Abdichtungsbahn sealing membrane to rising constructional components.

Properties and added value

- Quick and easy to lay
- Adapts easily to the substrate
- Secure, easy incorporation of details
- No solution welding compound required
- No naked flame required
- For interior applications

Application

Substrate pretreatment

The substrate must be swept clean and be free of unevenness and sharp burrs.

Application

The adhesive properties of Katja Sprint Anschlussstreifens connector tape is set so that an immediate correction of the bonded surfaces is possible. The adhesive power increases with time and load resulting in a solid and tight connection. In case of low temperatures, the adhesion force development can be accelerated by the use of a hot air gun.

Bonding of front joints with Katja Sprint Abdichtungsbahn sealing membrane

The joints are bonded by removing the protective foil and firmly pressing the tape onto the membranes to be joined.

Connection to the moisture barrier

Bonding of Katja Sprint Abdichtungsbahn sealing membrane to the clean moisture barrier with Katja Sprint Anschlussstreifen connector tape.

Application temperature/climate

The application temperature may not be below +5 °C.

References to other documents

- Katja Sprint Anschlussfix, see Product Data Sheet F458.de
- Katja Sprint Abdichtungsbahn sealing membrane, see Product Data Sheet F457.de

F459.de Katja Sprint Anschlussstreifen connector tape

Self-adhesive connector tape for Katja Sprint Abdichtungsbahn sealing membrane



Technical data

Description	Unit	Value	Standard
Roll weight	kg	4.3	–
Roll width	m	0.20	–
Roll length	m	15	–

Material requirement and efficiency

Product	Consumption	Efficiency
Katja Sprint Anschlussstreifen connector tape	1 m per metre connection length	Approx. 15 m per roll

Product range

Description	Package	Packaging unit	Material number	EAN
Katja Sprint Anschlussstreifen connector tape	15 m	60 rolls/pallet	00039929	4003982149329

Knauf Direct
Technical Advisory Service:

▶ knauf-direkt@knauf.de

▶ www.knauf.de

Knauf Gips KG Am Bahnhof 7, 97346 Iphofen, Germany

All technical changes reserved. Only the current printed instructions are valid. The stated information represents current state-of-the-art Knauf technology. The entire state of approved engineering rules, appropriate standards, guidelines, and rules of craftsmanship are not included herewith. These and all application instructions have to be adhered to separately by the installer. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas.

All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require our expressed permission.