


Note on English translation / Hinweise zur englischen Fassung

This is a translation of the product data sheet valid in Germany.

All stated details and properties are in compliance with the regulations of the German standards and building regulations. They are only applicable for the specified products, system components, application rules, and construction details in connection with the specifications of the respective certificates and approvals.

Knauf Gips KG denies any liability for applications outside of Germany as this requires changes acc. to the respective national standards and building regulations.

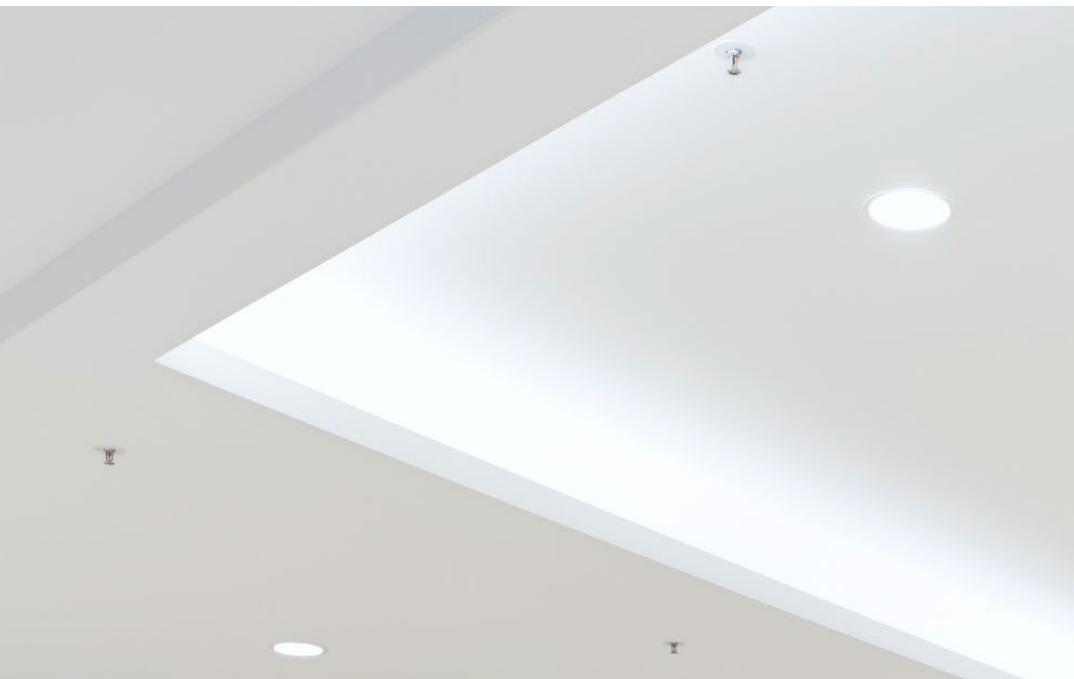


Drywall Systems

K431a.de

Product Data Sheet

2018-07

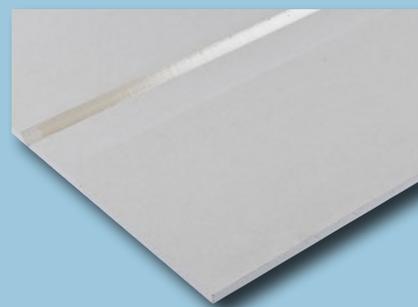

Klebe-Fix

Mitering with glued joint

Product description

Klebe-Fix is a design units made of gypsum board GKB with a glued joint. This design unit is supplied and delivered in a flat state and the L shape is established on site.

Storage

Store dry and dust free on a board pallet with the mitering facing downwards.

Quality

In compliance with EN 14190, the product is subject to initial type testing and continuous factory production control and bears the CE marking.

Shelf life

The exposed glue joint has shelf life of 6 months.

Properties and added value

- Space-saving logistics
- Secure transport to the building site
- High adhesive force

- Creation of the L shape by folding on site
- Simple and efficient application

Field of application

For creation of corner details on ceilings and walls.

Application

Application

Application should be undertaken in accordance to the applicable standards and acc. to the relevant Knauf System Data Sheets for drywall systems.

For further information refer to:

- Installation instructions Klebe-Fix K431a-A01.de
- Technical brochure Knauf Interior Design Tro145.de

Note

Screw fastening of the Klebe-Fix to a grid or frame is mandatory.

Technical data

Description	Unit	Value	Standard
Board type Germany	–	GKB	DIN 18180
Board type European	–	Procedure k)	EN 14190
Density	kg/m ³	approx. 680	DIN 18180
Board weight (nominal)	kg/m ²	approx. 8.5	DIN 18180
Reaction to fire	Class	A2-s1, d0 (C.3)	EN 14190
Edge types	–	Cut square edge (SK) 	–
Long term temperature exposure (max. limit)	°C	≤ 50	–

Product range

Description	Application mm	Miter layout mm	Length mm	Packaging unit	Material number	EAN
Klebe-Fix 90°	12.5	100 x 200	2500	200 pieces / pallet	00625963	4003982452177
		200 x 400	2500	100 pieces / pallet	00625967	4003982452191
		300 x 300	2500	100 pieces / pallet	00625969	4003982452214



The iPad App Knauf Infothek now provides all the current information and documents from Knauf Gips KG at any time and in every location in a clear and comfortable way.

[Knauf Infothek](#)

Knauf Direct

Technical Advisory Service:

▶ knauf-direkt@knauf.de

▶ www.knauf.de

Knauf Gips KG Am Bahnhof 7, 97346 Iphofen, Germany

All technical changes reserved. Only the current printed instructions are valid. The stated information represents current state-of-the-art Knauf technology. The entire state of approved engineering rules, appropriate standards, guidelines, and rules of craftsmanship are not included herewith. These and all application instructions have to be adhered to separately by the installer. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas.

All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require our expressed permission.